


Master links

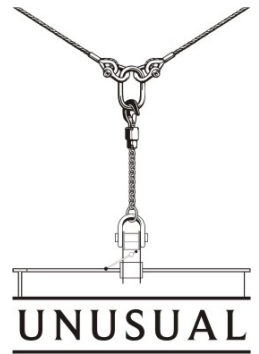

Conforms to DIN EN 1677-4

- Forged master link with a matt black surface
- Use for single leg central connections
- Can also be used as an end link (remove the identification tag)
- WWL capacities from 880kg to 3500 kg

When used according to BGV-C1 for rigging applications, the WLL values must be reduced by half, according to DIN/EN.

If you cannot see what you want here, please email our [sales department](#) or call us on +44 1604 830083.

All technical specifications are approximate and do not form part of any contract. Unusual Rigging cannot accept any responsibility for errors and omissions and reserves the right to make changes. The user must determine the suitability of any products for their own particular purpose, both alone and in conjunction with any other product and shall assume all risk and liability in connection with them.